


Technical Datasheet for RRK 2000 WID with combustion TSRF

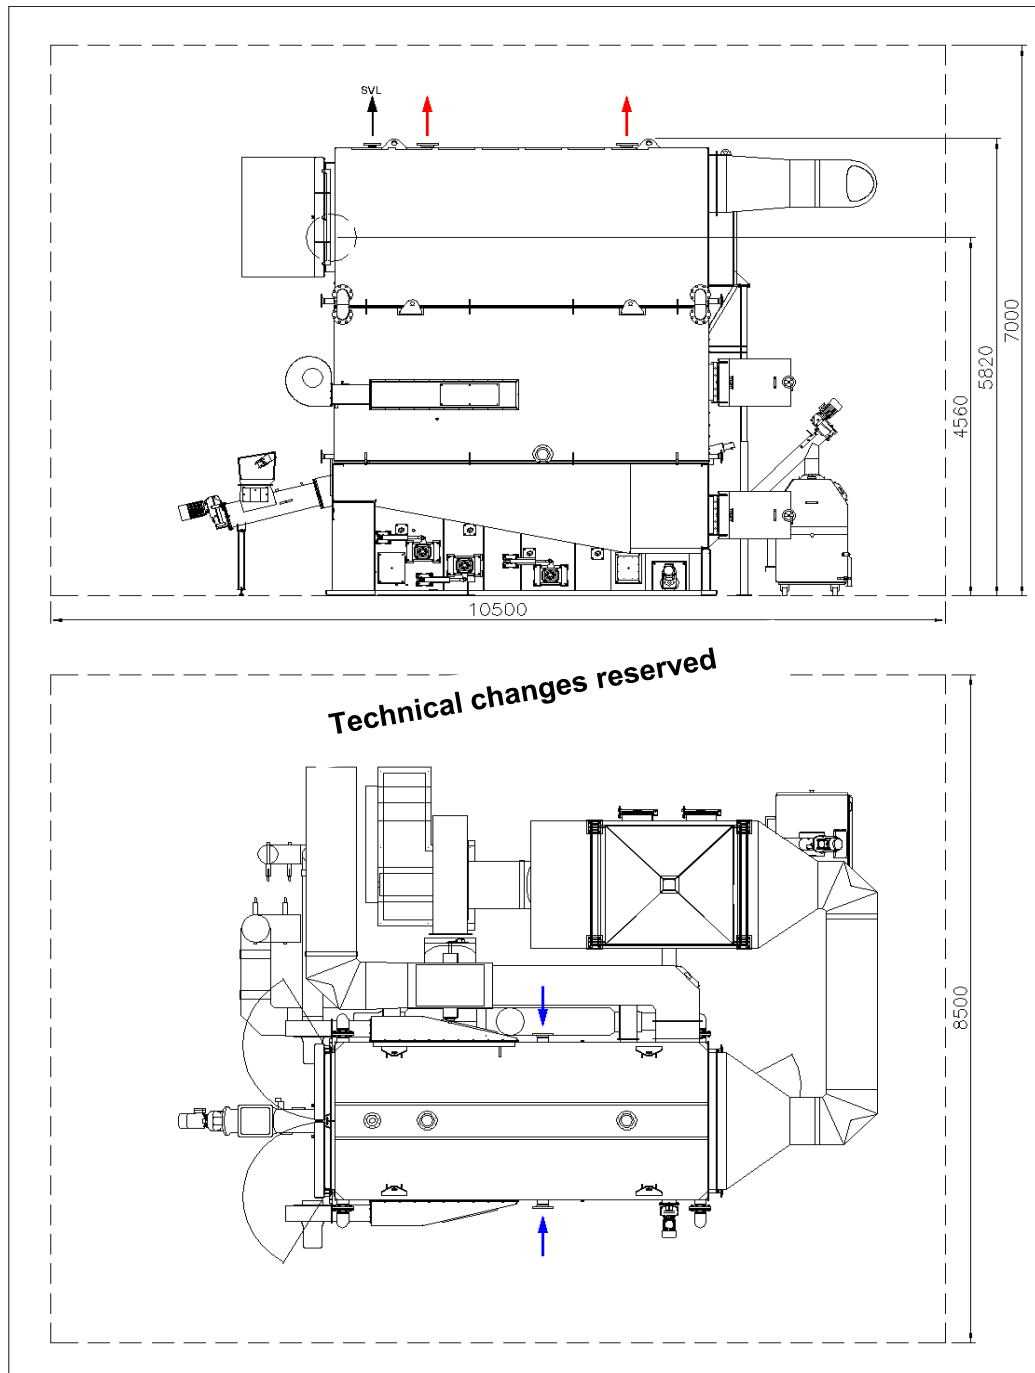

Notes

Min. required inlet opening for boiler installation in one piece (lxwxh)	mm	5.100 x 2.500 x 6.100
Min. required inlet opening for divided boiler installation (lxwxh)	mm	5.100 x 2.500 x 2.500

Questions concerning the transfer of the vessel into the boiler room have to be discussed with the Herz.
Schematic drawing. Vessel will be customized for the customers needs.
Herz operating conditions shall apply. Conditions for combustion type TSRF
Technical changes reserved

Myriad Heat & Power Products Ltd

Design / Project Management / Distribution / Servicing / Training

Registered in England No. 07691864 VAT Reg No. 251 3161 43

Myriad Heat & Power Products Ltd, Unit 21 Burrough Court, Burrough on the Hill, Melton Mowbray, Leics. LE14 2QS

Technical Datasheet for RRK 2000 WID

with combustion TSRF

Performance data		max. nominal output PN		kW	2000
		max. output PF		kW	2247
Combustion data		grate surface		m ²	4,50
		combustion chamber volume	A	m ³	13
		heat exchanger surface		m ²	150
	6 bar	total weight with water	B	kg	41325
		total weight without water	B	kg	31725
		boiler block	C	kg	24845
	10 bar	total weight with water	B	kg	41880
		total weight without water	B	kg	32280
		boiler block	C	kg	25400
		combustion	C	kg	6880
		refractory clay	D	kg	10640
Dimensions		combustion [l x w x h]	E	mm	4.900 x 2.100 x 1.700
		boiler block [l x w x h]	E;F	mm	4.800 x 2.740 x 4.120
		complete [l x w x h]	E;F	mm	4.900 x 2.740 x 5.820
Hydraulic connections		flow	G	Zoll, DN	2 x DN125 - PN16
		return	G	Zoll, DN	2 x DN125 - PN16
		safety flow	H	Zoll, DN	DN80 - PN16
		safety heat exchanger	I	Zoll	2 x 1"
		socket for thermostat		Zoll, DN	8 x 1/2"
		drain		Zoll, DN	8 x DN50 - PN16
		water content		l	9600
		resistance at Δt 20°		mbar	132
		flow at Δt 20°		m ³ /h	90,3
		min. pump flow		m ³ /h	104
Electric connections		primary fan		kW	2 x 3
		sekundary fan		kW	3
		exhaust gas fan (without HV)		kW	15
		exhaust gas fan (with HV)		kW	22
		flue diameter	J	mm	550
		flue area		m ²	0,2376
		draft	K	Pa	10
		exhaust gas temperature	L	°C	160-180
		M30 / W30	M	Bm ³ /h	8300

Notes

- A** Total combustion volume until heat exchanger entry
- B** Weight of combustion, boiler block and refractory including doors and casing
- C** Weight including refractory, doors and casing
- D** Weight of refractory including concrete and burning chamber interior isolation
- E** Dimensions including mounted doors
- F** Boiler block will be in pieces from boiler range 1800-2300 upwards.
- G** All existing flanges must be connected (for boiler types RRK 22-49 and RRK 80-175 only 1 return flange has to)
- H** Safety valve has to be dimensioned, provided and mounted by the customer and has to comply with local laws and other governmental enactments
- I** The mounting of the thermal safety valve including the piping has to be done by the customer.
- J** Chimney diameter and height and also the cleaning openings have to be approved by local authorities.
- K** The vessel is equipped with a flue gas fans, which assures the necessary vacuum into then combustion chamber.
- L** Flue gas temperature depends on the used combustible and the operating state (part or full load) and also of the degree of pollution of the heat exchanger.
- M** Flue gas volume at λ 1,6 (8% residual oxygen) and 180°C flue gas temperature

Version: V01 | Datum: 31.5.2017

Myriad Heat & Power Products Ltd

Design / Project Management / Distribution / Servicing / Training

Registered in England No. 07691864 VAT Reg No. 251 3161 43

Myriad Heat & Power Products Ltd, Unit 21 Burrough Court, Burrough on the Hill, Melton Mowbray, Leics. LE14 2QS